

For JPI Flanges

基本型、帶內環

渦卷型墊片規格表

根據:

JPI-7S-41-2005

JPI-7S-41-1998(舊)


適用法蘭:

JPI-7S-15


ANSI B 16.5

基本型: 1804/1806/9090

附內環: 1804R/1806R/9090-IR

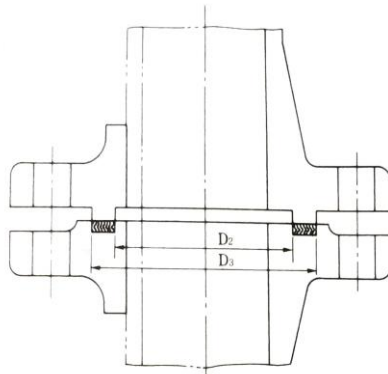

大凸環/槽接合面

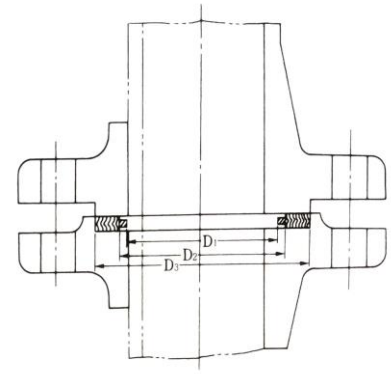

大凸面/凹面接合面

法蘭尺寸	內環內徑 D1					內徑 D2	外徑 D3
	Class 300	Class 400/600	Class 900	Class 1500	Class 2500		
1/2"	14.2	14.2	14.2	14.2	14.2	25.1	35.4
3/4"	20.6	20.6	20.6	20.6	20.6	33.0	43.2
1"	26.9	26.9	26.9	26.9	26.9	37.8	51.1
1-1/4"	38.1	38.1	33.3	33.3	33.3	47.2	63.8
1-1/2"	44.4	44.4	41.4	41.4	41.4	53.5	73.5
2"	55.6	55.6	52.3	52.3	52.3	72.6	92.5
2-1/2"	66.5	66.5	63.5	63.5	63.5	85.3	105.2
3"	81.0	81.0	78.7[81.0]	78.7[81.0]	78.7[81.0]	107.6	127.3
3-1/2"	93.7	93.7	--	--	--	120.3	140.0
4"	106.4	102.6[106.4]	102.6[106.4]	97.8[106.4]	97.8[106.4]	131.2	157.6
5"	131.8	128.3[131.8]	128.3[131.8]	124.5[131.8]	124.5[131.8]	160.0	186.3
6"	157.2	154.9[157.2]	154.9[157.2]	147.3[157.2]	147.3[157.2]	190.2	216.3
8"	215.9	205.7[209.6]	196.8[209.6]	196.8[206.2]	196.8[200.2]	237.7	270.0
10"	268.2	255.3[260.4]	246.1[260.4]	246.1[257.8]	246.1[247.6]	285.7	323.9
12"	317.5	307.3[317.5]	292.1[314.5]	292.1[314.5]	291.1[292.1]	342.9	381.0
14"	349.2	342.9[349.2]	320.8[342.9]	320.8[339.8]	--	374.6	412.8
16"	400.0	389.9[400.0]	374.6[393.7]	368.3[387.4]	--	425.4	469.9
18"	449.3	438.1[449.3]	425.4[444.5]	425.4[438.2]	--	488.9	533.4
20"	500.1	488.9[500.1]	482.6[495.3]	476.2[489.0]	--	533.4	584.2
24"	603.2	590.5[603.2]	590.5[603.2]	577.8	--	641.8	691.7

- (1) Class 150 不使用大凸面/凹面接合面、大凸環/槽接合面法蘭
- (2) 考慮到墊片厚度尺寸公差，建議法蘭接合面的槽深度為 5.5mm 以上
- (3) 建議使用 SNB-7 以上的高強度合金鋼螺栓
- (4) []內為(舊) JPI-7S-41-1998 規格